


STAINLESS STEEL ROTARY LOBE PUMP

- PV -

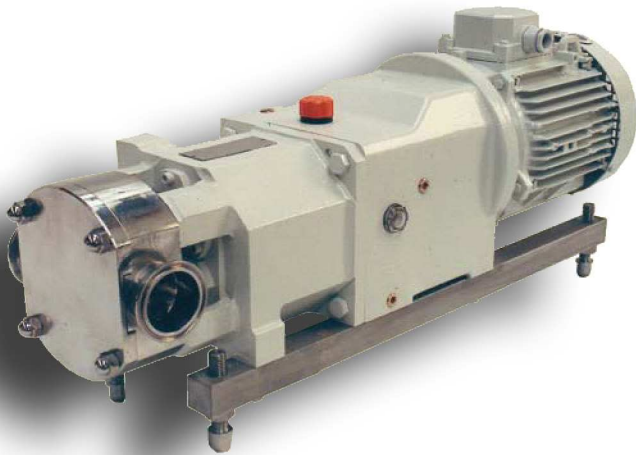


FEATURES

- Hygienic, cleanable in place
- Conformity with NF U61-060, CE, 3A standards
- Can be dry run for a short period
- Minimum pump slippage
- Pumping of particles of 18 to 34 mm
- Suitable for vertical assembly without deadzone
- Compact design
- Easy maintenance
- Capacity from 0,1 up to 60 m³/Hr
- Discharge head up to 70 m.w.c
- Product transfer at constant flow
- The products are protected by the lobe principle and the low rotation speed
- Low noise level
- Designed for strength and safety
- Extended service interval
- Stable support frame
- Short delivery times
- Low maintenance costs
- Full technical and service support from the manufacturer **PIERRE GUERIN**.

TECHNICAL SPECIFICATIONS

- Product contact parts in 1,4401stainless steel (AISI 316). Ra < 1.6 µm
- Viton gasket as standard design
- Mechanical seal (several alternatives are available according to the application)
- Reduced slippage impeller design
- Fixed or variable speed drive
- One piece assembly
- Choice of connections.

Curves

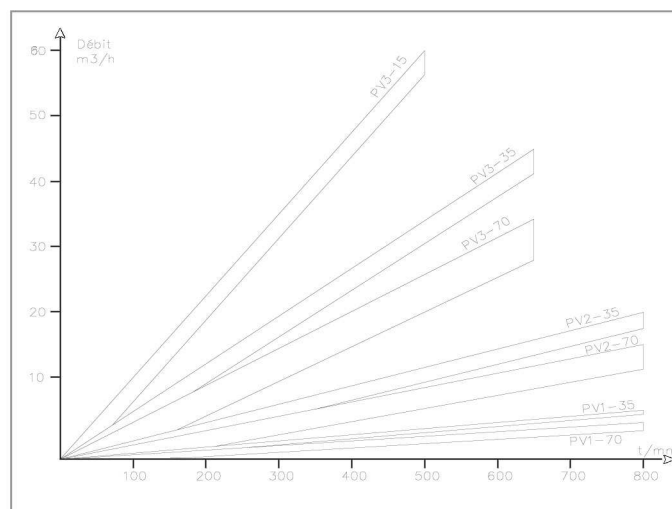

PIERRE GUERIN S.A.S. - BP 12 -79210 MAUZE (France) - TEL : +33 (0)5 49 04 78 00 - FAX : +33 (0)5 49 04 78 88 – www.pierreguerin.com

For UK Enquiries: Pump & Package Ltd, 29E Station Road, Desborough, Northants. UK NN14 2RL.

TEL: +44 (0)1536 762674 - Fax: +44 (0)1536 761973

E-mail: pumppackage@btconnect.com