

# TUBULAR GLASS GAUGE VALVES (GAUGE COCKS)


## KTV TUBULAR VALVES FOR LIQUID LEVEL GAUGES



### APPLICATIONS:

The KENCO Tubular Valve (KTV), when used with a KENCO "SAFEGUARD" level gauge or KENCO "EPG" level gauge, provides maximum operator safety and environmental protection from a potential gauge glass failure. The KTV is designed for service in low to medium pressure applications up to 500 psig.

### KTV TUBULAR VALVES

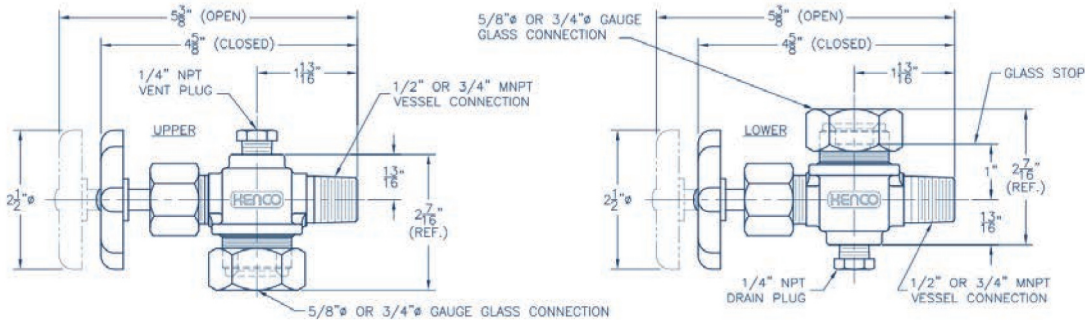

### FEATURES:

- Available in zinc plated carbon steel or 316 stainless steel (wetted)
- The 1/8" thick stuffing box O-ring provides easy installation of the glass and requires less wrenching of the packing nut to seal
- Positive O-ring seal gauge glass connection
- 1/2" or 3/4" MNPT rigid vessel connections
- 1/4" FNPT Vent/Drain port with plug
- Flanged vessel connections available
- Ball check shut off will protect tank inventory
- Straight pattern design
- Braided PTFE stem packing
- All valves are supplied with 316 S.S. valve stem, ball check and valve stem packing washer
- The bodies are precision cast investment castings with each body pressure tested to assure quality
- When ball checks are removed, KTV is suitable for steam applications

## ORDERING GUIDE

### KTV Tubular Valves

REQUESTED BY: \_\_\_\_\_ COMPANY: \_\_\_\_\_  
 ADDRESS: \_\_\_\_\_ CITY: \_\_\_\_\_ STATE: \_\_\_\_\_ ZIP: \_\_\_\_\_  
 PHONE: \_\_\_\_\_ FAX: \_\_\_\_\_ EMAIL: \_\_\_\_\_

KTV			
<b>Valve Style</b>	<b>Process Connections</b>	<b>Valve Body Material</b>	<b>Seal Material</b>
	50=1/2" MNPT w/ 5/8" O.D. Gauge Glass Connection 75=3/4" MNPT w/ 3/4" O.D. Gauge Glass Connection 50FL=1/2" 150# R.F. Flange and 3/4" O.D. Gauge Glass Connection 75FL=3/4" 150# R.F. Flange and 3/4" O.D. Gauge Glass Connection 10FL=1" 150# R.F. Flange and 3/4" O.D. Gauge Glass Connection 15FL=1-1/2" 150# R.F. Flange and 3/4" O.D. Gauge Glass Connection 20FL=2" 150# R.F. Flange and 3/4" O.D. Gauge Glass Connection 50FL300= 1/2" 300# R.F. Flange and 3/4" O.D. Gauge Glass Connection 75FL300= 3/4" 300# R.F. Flange and 3/4" O.D. Gauge Glass Connection 10FL300=1" 300# R.F. Flange and 3/4" O.D. Gauge Glass Connection 15FL300= 1-1/2" 300# R.F. Flange and 3/4" O.D. Gauge Glass Connection 20FL300=2" 300# R.F. Flange and 3/4" O.D. Gauge Glass Connection (Other Flange Sizes/Ratings Available upon Request)	SS=316 Stainless Steel CS=Zinc Plated Carbon Steel	V=Fluorocarbon A=Aflas B=Buna-N T=FEP Encapsulated Silicone E=Ethylene Propylene (Other Materials Available upon Request)
		<b>Steam</b> Non-Steam Application (Leave Blank) S=Steam Application	<b>NACE</b> NACE is not required (Leave Blank) NACE=NACE MR0175 compliant (available on "KTV50-CS" and "KTV75-CS" valves only)

• Example Order Number: KTV50-SS-B